



CONDENSER HEAT PUMP - PERFORMANCE HEAT EXCHANGER: B26Hx40/1P

SWEP SSP G8 2022.824.1.0

Date: 01/10/2022

SSP Alias: B26-NHP

DUTY REQUIREMENTS		Side 1		Side 2
Fluid		R410A		Water
Flow type		Counter-Current		
Circuit		Inner		Outer
Heat load	kW		15.00	
Inlet vapor quality		1.000		
Outlet vapor quality		0.000		
Inlet temperature	°C	60.00		43.00
Condensation temperature (dew)	°C	51.45		
Subcooling	K	3.00		
Outlet temperature	°C	48.35		50.00
Flow rate	kg/s m³/h	0.09740		1.865
Fluid condensed	kg/s	0.09740		
PLATE HEAT EXCHANGER		Side 1		Side 2
Total heat transfer area	m²		1.56	
Heat flux	kW/m²		9.6	
Mean temperature difference	K		4.26	
O.H.T.C. (available/required)	W/m²,°C		2270/2260	
Pressure drop - total*	kPa	4.80		4.15
- in ports (Inlet/Outlet)	kPa	-0.101/0.0997		0.386
Operating pressure (outlet)	kPa	3150		
Number of channels per pass		19		20
Number of plates			40	
Oversurfacing	%		0	
Fouling factor	m²,°C/kW		0.001	
Port diameter (up/down)	mm	24.0/18.0		27.0/27.0
Recommended inlet connection diameter	mm	6.12 - 13.7		
Recommended outlet connection diameter	mm	8.30 - 16.6		
Reynolds number				780.8
Inlet Port velocity	m/s	1.62		0.905
Channel velocity	m/s	0.244		0.164
Shear stress	Pa			7.98
Largest wall temperature difference	K		0.20	
Min./Max. wall temperature	°C	44.24/51.61		44.14/51.48
*Excluding pressure drop in connections.				
PHYSICAL PROPERTIES		Side 1		Side 2
Reference temperature	°C	51.40		46.50
Liquid • Dynamic viscosity	сР	0.0799		0.581
Density	kg/m³	899.6		989.6
 Heat capacity 	kJ/kg,°C	2.343		4.180
 Thermal conductivity 	W/m,°C	0.07917		0.6393
Vapor • Dynamic viscosity	cP	0.0146		
 Density 	kg/m³	132.7		
Heat capacity	kJ/kg,°C	1.684		
 Thermal conductivity 	W/m,°C	0.01405		
Latent heat	kJ/kg	133.3		
Film coefficient	W/m²,°C	4700		6570
TOTALS		Side 1		Side 2



www.swep.net


Date: 01/10/2022



www.swep.net

TOTALS	Side 1	Side 2
Total weight (no connections)*	kg	5.8 - 6.07
Hold-up volume (Inner Circuit)	dm³	0.84
Estimated refrigerant charge	kg	0.25
Hold-up volume (Outer Circuit)	dm³	1.32
Port size F1/P1	mm	24
Port size F2/P2	mm	27
Port size F3/P3	mm	18
Port size F4/P4	mm	27
Carbon footprint	kg	40.74
*Weight depends on the selected product.	-	

DIMENSIONS

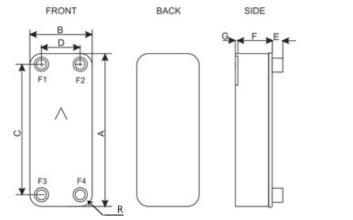

Α	mm	376 ±1
В	mm	119 ±1
С	mm	329 ±1
D	mm	72 ±1
E	mm	20 (opt. 45) ±1
F*	mm	68.4 - 72.4 +1.5%/-3.5%
G*	mm	4 - 6 ±1
0	mm	2
R	mm	23

^{*}Dimensions depend on the selected product.

Disclaimer:

Data used in this calculation is subject to change without notice. SWEP strives to use "best practice" for the calculations leading to the above results. Calculation is intended to show thermal and hydraulic performance, no consideration has been taken to mechanical strength of the product. Product restrictions - such as pressure, temperatures and corrosion resistance- can be found in SWEP product sheets and other technical documentation. SWEP may have patents, trademarks, copyrights or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from SWEP, the furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property. To the maximum extent permitted by applicable law, the software, the calculations and the results are provided without warranties of any kind, whether express or implied. No advice or information obtained through use of the software (including information provided in the results), will create any warranty not expressly stated in the applicable license terms. Without limiting the foregoing, SWEP does not warrant that the content (including the calculations and the results) is accurate, reliable or correct. SWEP does not warrant that any system comprising heat exchanger and other components, installed on the basis of calculations in this software, will meet your requirements or function to your satisfaction or expectations.



Date: 01/10/2022

^{*}This is a schematic sketch. For correct drawings please use the order drawing function or contact your SWEP representative.